


Technical Specifications

HP Z24f G3 FHD Display

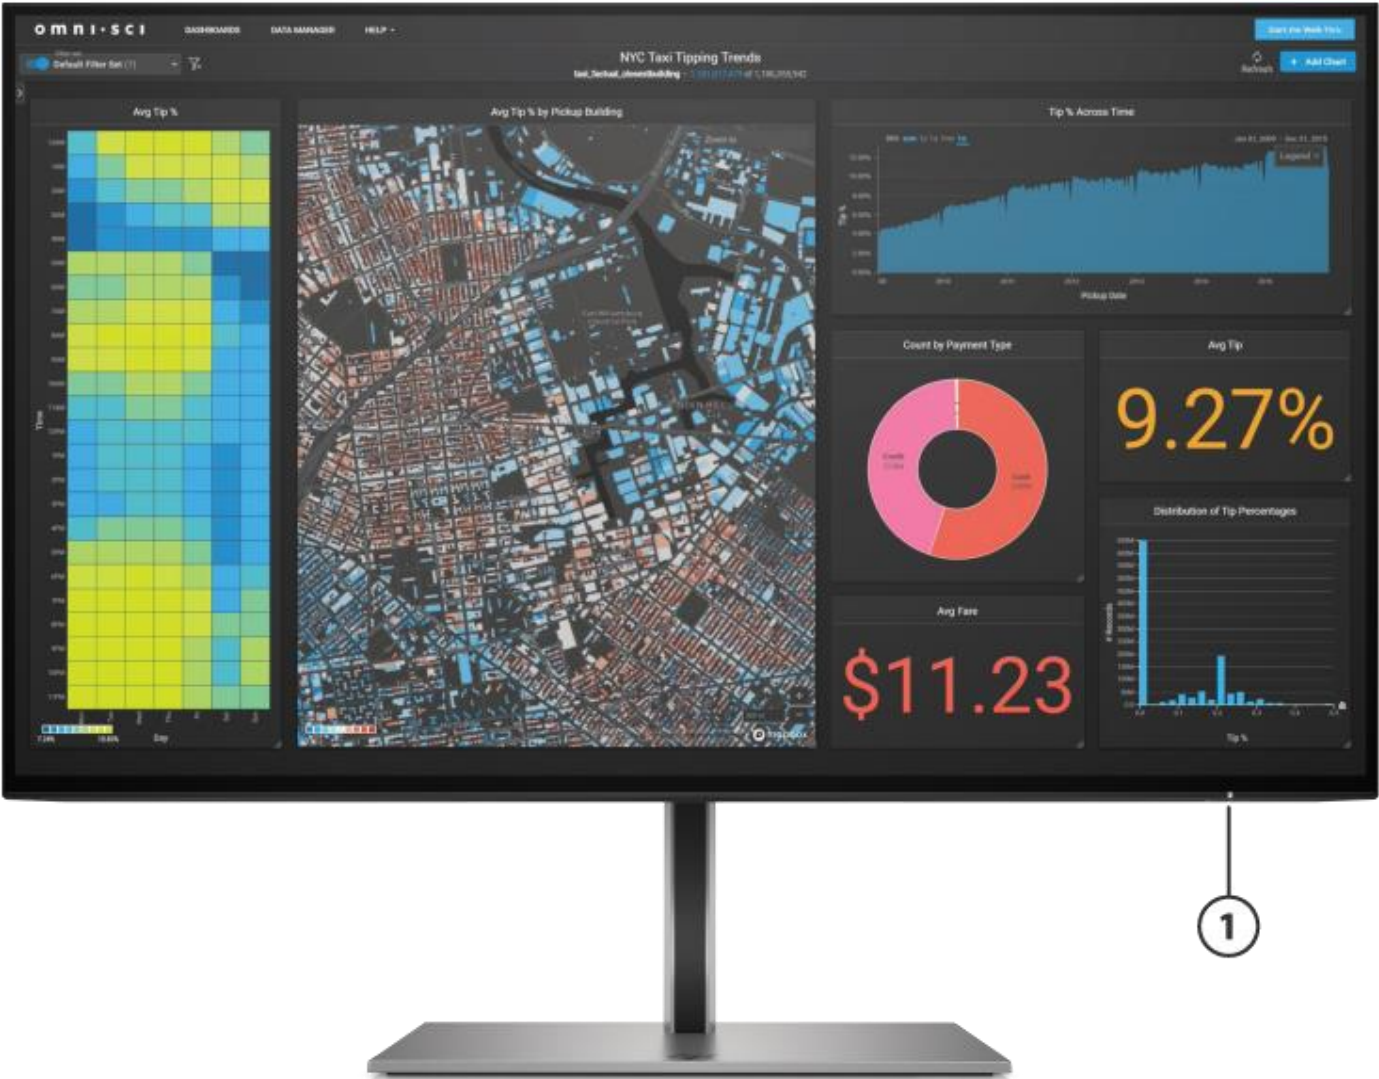


Front

- 1. Power button

Technical Specifications

HP Z24f G3 FHD Display

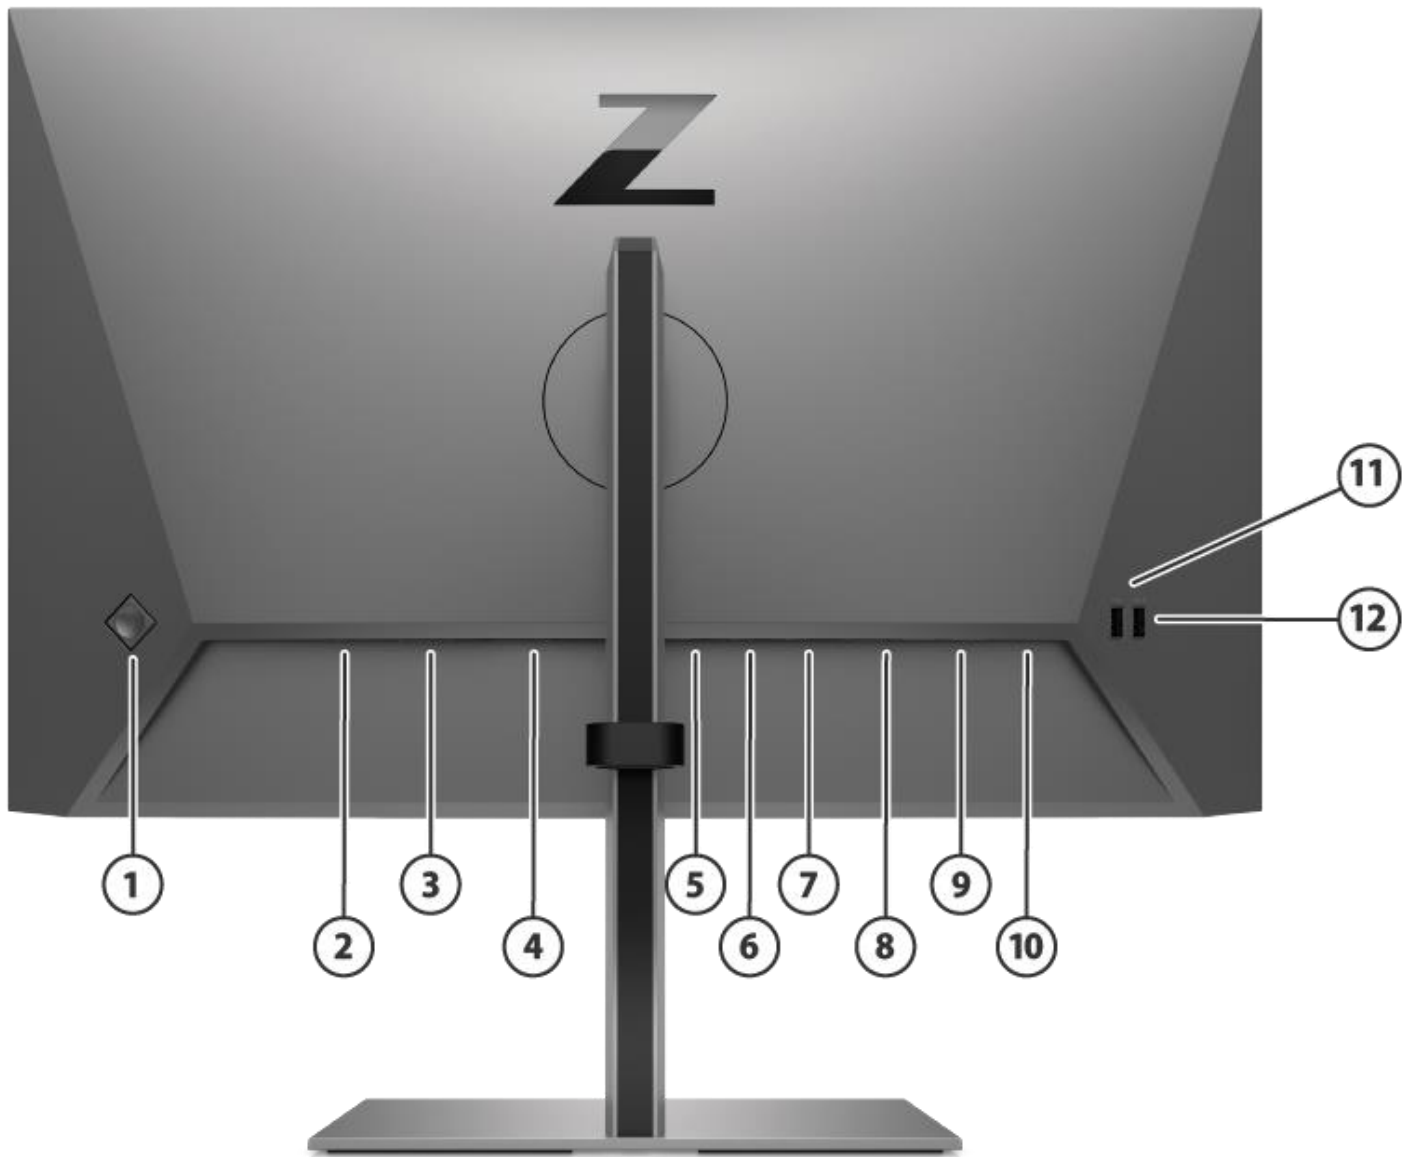

Back

- | | |
|---------------------------|---|
| 1. OSD control | 7. DisplayPort™ connector (out) |
| 2. Security cable slot | 8. USB Type-B port (upstream) |
| 3. Master power switch | 9. USB port |
| 4. Power connector | 10. USB port (Battery charging 1.2, 7.5W) |
| 5. HDMI port | 11. USB port |
| 6. DisplayPort™ connector | 12. USB port (Battery charging 1.2, 7.5W) |

Technical Specifications

Panel Specifications	Display Size (Diagonal)	23.8"
	Panel Technology	IPS
	Refresh Rate	60 Hz
	Panel Bit Depth	8 bit (6bit + FRC)
	Aspect Ratio	16:9
	Brightness (Typical)	300 nits
	Contrast Ratio (Static)	1000:1
	Dynamic Contrast Ratio	10M:1
	Flicker Free	Yes
	Pixel Pitch	0.2745mm
	Pixels Per Inch (Ppi)	93 PPI
	Backlight Lamp Life Minimum (To Half Brightness - In Hours)	40 k
	Backlight Type	Edge-lit
	Screen Treatment	Anti-glare
	Hardness	3H
	Haze	25%
	Response Time (Typical)	5ms GtG (with overdrive)
	Horizontal Viewing Angle (Typical Cr>10)	178°
	Vertical Viewing Angle (Typical Cr>10)	178°
	Panel Active Area (W X H)	527.04(H)*296.46(V)
	NOTE: Performance Specifications Represent The Typical Specifications Provided By HP's Component Manufacturers; Actual Performance May Vary Either Higher Or Lower.	
Color Management	Factory Color Calibrated	Yes (Delta E <=2)
	Calibrated Color Presets	sRGB, BT.709, (Color Match)
	RGB Channel Adjust	Yes, Gain
	Default Color Temperature	sRGB
Color	sRGB	99 %
	P3 D65	85%
Monitor Specifications	Bezel	4-sided Micro Edge
	Color	(Head) Turbo Silver ; (Stand) Turbo Silver
	Tilt	-5 to +20°
	Swivel	±45°
	Pivot	±90
	Height Adjust Range	150mm
	VESA Mounting	N/A
	Security Lock Ready	Standard Security Lock Slot
	Detachable Stand	Yes
	Warranty (Number of Years)	3/3/0 for LA, NA, EMEA, APJ; (3/3/3 in select APJ Countries)
	Low Blue Light Mode	Yes, HP Eye Ease (TÜV Low Blue Light Hardware Solution certified)
	Display Management Software	HP Display Center

Technical Specifications

	On Screen Display	Joystick
	On Screen Controls	Brightness +, Color, Image, Input, Power, Menu, Management, Information, Exit
	User-Assignable Function Buttons	Yes, 4 buttons
	Native Resolution	Full HD (1920 x 1080)
	Native Resolution Footnote	
	Maximum Resolution	1920×1080 @ 60Hz
	Preset Graphic Modes/Supported Resolutions	640 × 480@60Hz
		800 × 600@60Hz
		1024 × 768@60Hz
		1280 × 720@60Hz
		1280 × 800@60Hz
		1280 × 1024@60Hz
		1440 × 900@60Hz
		1600 × 900@60Hz
		1680 × 1050@60Hz
		1920 × 1080@60Hz
	High Definition Video Formats	720 × 480p@60Hz
		720 × 576p@50Hz
		1280 × 720p@50Hz
		1280 × 720p@60Hz
		1920 × 1080p@50Hz
		1920 × 1080p@60Hz
	Minimum Vertical Scan Rate	50 Hz
	Maximum Vertical Scan Rate	60 Hz
	Minimum Horizontal Scan Rate	30.0 kHz
	Maximum Horizontal Scan Rate	75.0 kHz
	Maximum Pixel Clock	170 MHz
	Languages	10 (English, Spanish, German, French, Italian, Netherlands, Portuguese, Japanese, T-Chinese and S-Chinese)
Connector Types	DisplayPort™	1 DisplayPort™ 1.2
	DisplayPort™ Out	1 DisplayPort™ 1.2-out
	HDMI	1 HDMI 1.4
	USB- A	4 USB-A 3.2 Gen1 (2 for battery charging 1.2, 7.5W)
	USB-B (Hub enablement)	1 USB-B
Special Features	DaisyChain/DisplayPort Multi stream Transport (MST)	Yes
Power & Operating Specs	Power Supply	Internal
	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption- MAX	58 W
	Energy Saving/Stand By Mode	0.5 W
	Power Consumption- Typical	26 W
	Power Cable Length	1.9m
ENERGY STAR Data	Operational Mode at 100 VAC	11.06 W
	Operational Mode at 115 VAC	11.1 W

Technical Specifications

	Operational Mode at 230 VAC	11.1 W	
EU Energy Efficiency Class (ERP Lot-5)	On-mode Power Consumption	12.5 W	
	Annual Power Consumption Energy Efficiency Class	19 kWh D	
Operating Conditions	Operating Temperature - Celsius	5° – 35°C	
	Operating Temperature - Fahrenheit	41° – 95°F	
	Non-Operatin Temperature - Celsius	–34° – 60°C	
	Non-Operating Temperature - Fahrenheit	29° – 140°F	
	Operating Humidity	20 – 80% Relative Humidity (non-condensing)	
	Non-Operating Humidity	5 – 95%	
	Operating Altitude	0 – 5,000 m (16,400 ft.)	
	Non-operating Altitude	0 – 12.192 m (40,000 ft.)	
Environmental Features and Certifications	Mercury-free LED display backlighting	Yes, Mercury-free LED backlighting	
	Arsenic-Free Display Glass	Yes	
	Low Halogen	Yes	
	Agency Approvals And Certifications	WW application	
		CE,CB,KC/KCC/NOM/PSB/EAC/GS/TUV-S/ISO 9241-307/	
		Low Blue Light/ BIS/cTUVus/CCC/CEL/CECP/SEPA/Energy	
		Star/TCO/TCO Certified Edge/VCCI/FCC/BSMI/Vietnam	
		MEPS/Australian-New Zealand	
		MEPS/WEEE/UAE/Ukraine/ERP/ISC	
		Microsoft WHQL Certification	Yes
		ENERGY STAR® Certified	Yes
		EPEAT® Registered	Yes
		Regions need to verify by country	
		China Energy Label	CEL Grade 1
		TCO Certified Edge	Yes
		TCO Certified	Yes
		SmartWay Transport Partnership - NA only	Yes (NA sku)
Contains Recycled Plastics	Contains Recycled Plastics	80.76%	
	Recyclable Packaging (Box, packing materials)	100% recyclable packaging.	
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	53.84 x 19.5x 48.93 cm	21.2x7.68 x 19.26 in
	Product Dimensions (Packed) (W x D x H)	62.5 x 37.3 x 14.2 cm	24.61 x 14.69 x 5.59 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	53.84 x3.85x 31.37 cm	21.2x 1.52 x 12.35 in
	Base Area Footprint (w x d mm)	232 X 195 mm	9.13 X 7.7 in
	Bezel Measurements - Metric	Bottom Cover:530.2mm	Bottom Cover:20.87in
	Product Weight (Unpacked with stand)	4.7 kg	10.4 lb

Technical Specifications

	Product Weight (Packed)	7.2 kg	15.6 lb
	Product Weight (Head Only)	3.5 kg	7.7 lb
What's in the box?	Documentation kit DP1.4 Cable (1.8m) USB3.0 Type A to B (1.8m) Power cable VESA Adapter Cable Holder		
User Guide and Warranty Languages	User Guide Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	
	Warranty Languages	English, Arabic, S. Chinese, T. Chinese, Czech, Danish, Dutch, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Kazakh, Korean, Norwegian, Polish, Brazilian Portuguese, Russian, Slovenian, Spanish, Swedish and Turkish.	

Technical Specifications

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries.

ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.

Summary

Change Log			
January 12, 2021	V1 to V2	Updated	Technical Specifications
February 28, 2021	V2 to V3	Updated	Energy Efficiency Class
April 15, 2021	V3 to V4	Update	VESA Mounting Specs
	V4 to V5		