

Overview


HP 250 G6 Notebook PC



Left

1. Webcam LED	8. USB 3.1 (Gen 1) port
2. Webcam	9. HDMI port
3. Microphone	10. RJ-45/Ethernet port
4. Touchpad	11. VGA port
5. Touchpad buttons	12. AC plug LED
6. Audio in/out combo jack	13. AC Smart Pin adapter plug
7. USB 3.1 (Gen 1) port	14. Power button

Overview

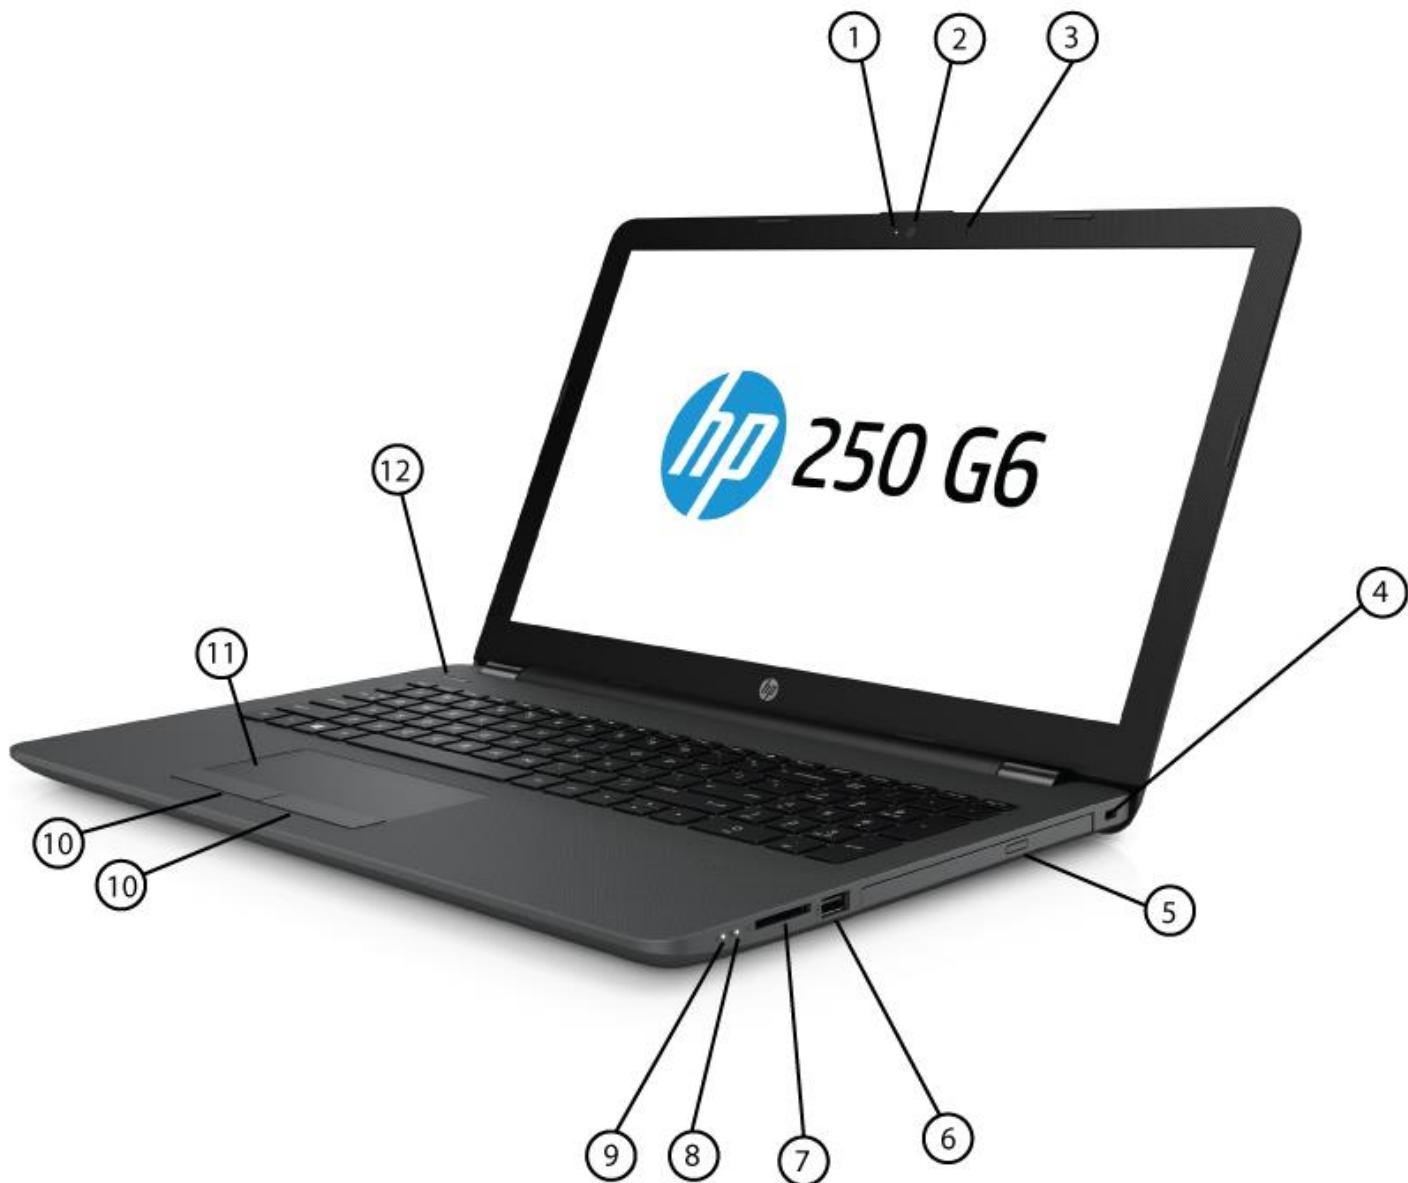

Right

1. Webcam LED	7. SD Card slot
2. Webcam	8. Hard drive indicator LED
3. Microphone	9. Power indicator LED
4. Security lock slot (Locks sold separately)	10. Touchpad buttons
5. Optical drive (optional)	11. Touchpad
6. USB 2.0 port	12. Power button

Overview

AT A GLANCE

- Windows 10 versions, FreeDOS 2.0
- Choice of the latest Intel® Core™, Intel® Pentium®, or Intel® Celeron® processors
- Intel® HD Graphics or AMD Radeon™ 520 (up to 2 GB of dedicated video memory)
- New Dark Ash Silver color with a fresh woven texture
- Display choices include: 15.6" diagonal HD or FHD
- Choice of hard drives up to 1 TB or M.2 SATA solid state drives up to 512 GB
- Weight starting at: 4.1 lbs (1.86 kg)
- Security features including FW TPM 2.0 and security lock slot (Lock not included)
- Keyboard
 - Full size textured island-style keyboard with numeric pad on the HP 250 G6"
- Touchpad with gestures support
- HP webcam with single digital microphone and HD (supporting WDR- Wide Dynamic Range) or VGA camera
- Two USB 3.1 (Gen 1) ports and One USB 2.0 port
- Wireless LAN (WLAN) up to 2x2 802.11ac to keep you connected

NOTE: See important legal disclosures for all listed specs in their respective features sections.

Features

PRODUCT NAME

HP 250 G6 Notebook PC

OPERATING SYSTEM

Preinstalled OS	Windows 10 Pro 64 ¹
	Windows 10 Pro 64 (National Academic only) ¹
	Windows 10 Home 64 ¹
	Windows 10 Home Single Language 64 ¹
	FreeDOS 2.0

NOTE 1: Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com/>.

PROCESSOR

Intel® Core™ i7-7500U with Intel® HD Graphics 620 (2.7 GHz, up to 3.5 GHz with Intel Turbo Boost Technology, 4 MB cache, 2 cores)^{2,3}

Intel® Core™ i5-7200U with Intel® HD Graphics 620 (2.5 GHz, up to 3.1 GHz with Intel Turbo Boost Technology, 3 MB cache, 2 cores)^{2,3}

Intel® i3-6006U with Intel® HD Graphics 520 (2 GHz, 3 MB cache, 2 cores)²

Intel® Pentium® N3710 with Intel® HD Graphics 405 (1.6 GHz, up to 2.56 GHz, 2 MB cache, 4 cores)²

Intel® Celeron® N3060 with Intel® HD Graphics 400 (1.6 GHz, up to 2.48 GHz, 2 MB cache, 2 cores)²

Processor Family

7th Generation Intel® Core™ i7 processor (7500U model)

7th Generation Intel® Core™ i5 processor (7200U model)

6th Generation Intel® Core™ i3 processor (6006U model)

Intel Braswell processor (Pentium N3710, Celeron N3060)

NOTE 2: Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

NOTE 3: In accordance with Microsoft's support policy, HP does not support the Windows 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

CHIPSET

Chipset is integrated with processor

Features

GRAPHICS

Integrated

Intel® HD Graphics 620 ⁴
Intel® HD Graphics 520 ⁴
Intel® HD Graphics 405 ⁴
Intel® HD Graphics 400 ⁴

Supports

HD Decode, DX12, and HDMI⁷

Discrete

AMD Radeon™ 520 (up to 2048 MB of dedicated video memory) ^{5,6}

NOTE 4: HD content required to view HD images.

NOTE 5: AMD Dynamic Switchable Graphics technology requires an Intel processor, plus an AMD Radeon™ discrete graphics configuration and is not available on FreeDOS. With AMD Dynamic Switchable Graphics technology, full enablement of all discrete graphics video and display features may not be supported on all systems (e.g. OpenGL applications will run on the integrated GPU or the APU as the case may be).

NOTE 6: Available on select processors.

NOTE 7: Cables sold separately.

DISPLAY

Internal

39.6 cm (15.6") diagonal HD SVA eDP anti-glare slim WLED (1366 x 768) ^{4,8}
39.6 cm (15.6") diagonal FHD SVA eDP anti-glare slim WLED (1920 x 1080) ^{4,8}

NOTE 4: HD content required to view HD images.

NOTE 8: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage

Support all 7.2mm/9.5mm, SATA 2.5" Hard Drives
1 TB SATA 5400 rpm SATA (7.2/9.5 mm) ⁹
500 GB SATA 5400 rpm SATA (7 mm) ⁹
500 GB SATA 7200 rpm SATA (7 mm) ⁹

M.2 SATA-3 Solid State Drives

128 GB M.2 SATA SSD ⁹
256 GB M.2 SATA SSD ⁹
512 GB M.2 SATA SSD ⁹
128 GB eMMC ⁹

Optical Drive

Optional DVD+/-RW Double-Layer Writer ^{10,11}

Features

NOTE 9: For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity is less. Up to 30 GB (for Windows 10) is reserved for system recovery software.

NOTE 10: HD-DVD disks cannot be played on this drive. No support for DVDRAM. Actual speeds may vary. Don't copy copyright-protected materials. Double Layer discs can store more data than single layer discs; discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

NOTE 11: Sold separately or as an optional feature.

MEMORY

Standard

DDR4 (Intel® Core™ i7-7500U, i5-7200U, i3-6006U processors only)

DDR4-2133 (Transfer rates up to 2133 MT/s) (DDR4-2400 bridge to DDR4-2133)

Dual channel support

No customer accessible / upgradeable

Configurations

4096 MB Total System Memory (4096 MB x 1)

6144 MB Total System Memory (2048 MB x 1 + 4096 MB x 1)

8192 MB Total System Memory (4096 MB x 2)

8192 MB Total System Memory (8192 MB x 1)

Maximum

Up to 8 GB DDR4-2133 SDRAM

Standard

DDR3L (Intel® Pentium® N3710, Celeron® N3060 processors only)

DDR3L-1600 (Transfer rates up to 1600 MT/s)

Single channel support

No customer accessible / upgradeable

Configurations

2048 MB Total System Memory (2048 MB x 1)

4096 MB Total System Memory (4096 MB x 1)

8192 MB Total System Memory (8192 MB x 1)

Maximum

Up to 8 GB DDR3L-1600 SDRAM

NETWORKING/COMMUNICATIONS

Wireless LAN (WLAN)

Realtek 802.11b/g/n (1x1) WiFi and Bluetooth® 4.0 Combo ¹²

Intel® Dual Band Wireless-AC 3168 802.11ac (1x1) Wi-Fi and Bluetooth® 4.2 Combo (non-vPro™) ¹²

Intel® Dual Band Wireless-AC 7265 802.11ac (2x2) WiFi and Bluetooth® 4.2 Combo (non-vPro™) ¹²

Ethernet

Integrated 10/100/1000 NIC

Communications

Compatible with Miracast-certified devices ¹³

Features

NOTE 12: Wireless access point and Internet service required and sold separately. Availability of public wireless access points limited. The specifications for the 802.11ac WLAN are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11ac WLAN devices.

NOTE 13: Miracast is a wireless technology your PC can use to project your screen to TVs, projectors, and streaming media players that also support Miracast. You can use Miracast to share what you're doing on your PC and present a slide show. For more information: <http://windows.microsoft.com/en-us/windows-8/project-wireless-screen-miracast>.

AUDIO/MULTIMEDIA

Audio

(2) Integrated stereo speakers

Camera

HP TrueVision HD Camera ⁴

Indicator LED, USB2.0, HD BSI sensor, f2.0, WDR

720p by 30 frames per second

Single digital microphone

Webcam

HP Webcam ¹⁴

VGA camera, indicator LED, USB 2.0, f2.4

480p by 30 frames per second

Single digital microphone

NOTE 4: HD content required to view HD images.

NOTE 14: Wireless access point and Internet service is required and is not included. Availability of public wireless access points limited.

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

Full size textured island-style keyboard with numeric keypad

Jet black

Touchpad

Multitouch gestures enabled

Support Modern Trackpad Gestures

Taps enabled as default

SOFTWARE AND SECURITY

Preinstalled Software

Buy Office

HP JumpStart

Windows 10 Redstone1 Recovery Manager Installer - CPS

Windows 10 Redstone1 Push Button Reset Recovery - CPS

HP Support Assistant

HP PC Hardware Diagnostics UEFI

HP ePrint ¹⁵

HP System Event Utility

CyberLink Power Media Player

Features

Bing Search for IE11
Security
firmware TPM 2.0
Security lock slot (Locks sold separately)

NOTE15: Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

POWER

Power Supply

65 W Smart AC adapter ¹⁷
65 W EM Smart AC adapter ¹⁷
45 W Smart AC adapter ¹⁷

Primary Battery

HP 3-cell battery, 31 Whr Li-ion
HP 4 cell battery, 41 Whr Li-ion

Power Cord

1 M (3.28 feet) length power cord with sticker label

Battery life

7th gen core CPU: Up to 12 hours (4 cell battery) ¹⁸
6th gen core CPU: Up to 10 hours (4 cell battery) ¹⁸
Intel® Pentium® and Celeron® CPU: Up to 9 hours and 30 minutes (4 cell battery) ¹⁸
Fast Charge (90 mins, 90% charged)
Supports battery fast charge

NOTE 17: Availability may vary by country.

NOTE 18: Windows 10 MM14 battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

WEIGHTS & DIMENSIONS

Weight

Starting at 1.86 kg ¹⁹
Starting at 4.1 lb ¹⁹

NOTE 19: Weight varies by configuration and components.

Dimensions (W x D x H)

38 x 25.38 x 2.38 cm
14.96 x 9.99 x 0.93 in

Features

PORTS/SLOTS

Ports/Connectors

USB 3.1 (Gen 1) ports - Two (Left)
USB 2.0 port - One (Right)
HDMI 1.4b - One ²⁰
VGA port - One
RJ-45 / Ethernet - One ²⁰
Headphone / microphone combo jack - One
AC Smart adapter port - One

Slots

HP Multi-Format Digital Media Card Reader
Supports SD/SDHC/SDXC

NOTE 20: All cables are sold separately.

SERVICE AND SUPPORT

HP Services offers limited 1-year warranty; 1-year limited warranty on primary battery. On-site service is also available with optional HP Care Services, which extend protection beyond the standard limited warranty. To choose the right level of service for your HP product, use the HP Care Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Services, information by product is available at: <http://www.hp.com/go/cpc>.²¹

NOTE 21: HP Care Packs are sold separately. Service levels and response times for HP Care Packs may vary depending on your geographic location. Service starts on date of hardware purchase. Restrictions and limitations apply. For details, visit www.hp.com/go/cpc. HP services are governed by the applicable HP terms and conditions of service provided or indicated to Customer at the time of purchase. Customer may have additional statutory rights according to applicable local laws, and such rights are not in any way affected by the HP terms and conditions of service or the HP Limited Warranty provided with your HP Product.

Technical Specifications

DISPLAYS

15.6" FHD WLED AntiGlare Outline Dimensions (1920x1080) slim (3.2mm) SVA, eDP	Outline Dimensions (W x H x D)	360 x 224.3 x 3.2 (max)
	Active Area	344.26 x 193.69 mm
	Weight	360g max
	Diagonal Size	15.6"
	Surface Treatment	AG
	Contrast Ratio	500:1 (typ. AG)
	Refresh Rate	60Hz
	Pixel Per Inch (PPI)	141
	Brightness	220 nit typ.
	Pixel Resolution	1920 x 1080 (FHD)
	Format	RGB
	Interface	eDP 1.2
	LCD Mode	TN
	Viewing Angle	45/45/20/45

15.6" HD WLED AntiGlare (1366x768) slim (3.2mm) SVA, eDP	Outline Dimensions (W x H x D)	359.5 x 223.8 x 3.2 (max)
	Active Area	344.23 x 193.54
	Weight	370g max
	Diagonal Size	15.6"
	Surface Treatment	AG
	Contrast Ratio	500:1 (typ. AG)
	Refresh Rate	60Hz
	Pixel Per Inch (PPI)	100
	Brightness	220 nit typ.
	Pixel Resolution	1366 x 768 (HD)
	Format	RGB
	Interface	eDP 1.2
	LCD Mode	TN
	Viewing Angle	45/45/20/40

STORAGE AND DRIVES

500 GB 5400 rpm SATA Drive Hard Drive	Weight	<95g (0.209lb)
	Capacity	500 GB
	Height	6.8 +/- 0.2 mm (0.268 +/- .008 in)

Technical Specifications

Width	69.85 +/- 0.25 mm (2.750 +/- 0.010 in)
Interface	SATA 6Gb/s
Performance	Maximum Sequential Read 600 MB/s max
	Maximum Sequential Write 600 MB/s max
Logical Blocks	976,773,168
Operating Temperature	32° to 140° F (0° to 60° C)
Features	DIPM

500 GB 7200 rpm SATA Drive Weight	<95g (0.209lb)
Hard Drive	
Capacity	500 GB
Height	6.8 +/- 0.2 mm (0.268 +/- .008 in)
Width	69.85 +/- 0.25 mm (2.750 +/- 0.010 in)
Interface	SATA 6Gb/s
Performance	Maximum Sequential Read 600 MB/s max
	Maximum Sequential Write 600 MB/s max
Logical Blocks	976,773,168
Operating Temperature	32° to 140° F (0° to 60° C)
Features	DIPM

1 TB 5400 rpm SATA Hard Drive Weight	90g(0.198lb)
Drive	
Capacity	1TB
Height	7.0 (\pm 0.2) mm / 0.276 (\pm 008) in

Technical Specifications

Width	69.85 (± 0.25) mm / 2.750 (± 0.010) in
Interface	SATA 6Gb/s
Performance	Maximum Sequential Read 600 MB/s max
	Maximum Sequential Write 600 MB/s max
Logical Blocks	1,953,525,168
Operating Temperature	32° to 140° F (0° to 60° C)
Features	DIPM
128 GB SATA-3 Value Drive Weight Solid State Drive	0.01 lb (6 g) ~ 0.02 lb (10 g)
Capacity	128 GB
Height	0.09 in (2.3 mm)
Width	0.87 in (22 mm)
Interface	ATA-8, SATA 3.0
Logical Blocks	250,069,680
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	DIPM; TRIM; DEVSLP
256 GB SATA-3 Value Drive Weight Solid State Drive	0.01 lb (6 g) ~ 0.02 lb (10 g)
Capacity	256 GB
Height	0.09 in (2.3 mm)
Width	0.87 in (22 mm)
Interface	ATA-8, SATA 3.0
Logical Blocks	500,118,192
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]

Technical Specifications

Features	DIPM; TRIM; DEVSLP
128 GB SATA TLC Solid Drive Weight	0.01 lb (6 g) ~ 0.02 lb (10 g)
State Drive	
Capacity	128 GB
Height	0.09 in (2.3 mm)
Width	0.87 in (22 mm)
Interface	ATA-8, SATA 3.0
Logical Blocks	250,069,680
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	DIPM; TRIM; DEVSLP
256 GB SATA TLC Solid Drive Weight	0.01 lb (6 g) ~ 0.02 lb (10 g)
State Drive	
Capacity	256 GB
Height	0.09 in (2.3 mm)
Width	0.87 in (22 mm)
Interface	ATA-8, SATA 3.0
Logical Blocks	500,118,192
Operating Temperature	32° to 158°F (0° to 70°C) [ambient temp]
Features	DIPM; TRIM; DEVSLP

Technical Specifications

NETWORKING/COMMUNICATIONS

WWAN

Realtek RTL8723DE 802.11 bgn 1x1 WiFi + BT 4.2 Combo Adapter

Technology/Operating bands 2.4Ghz

Wireless protocol standards 11n

Maximum data rates 150Mbps

Maximum output power CE/11g at max 17dBm

Maximum power consumption 736mW in Tx mode

Form Factor M2 1630

Weight 2 g

Dimensions 16 mm X 30 mm x 2.3 mm
(Length x Width x Thickness)

Intel Dual band wireless-AC 3168 802.11AC 1x1 WiFi + BT 4.2 Combo Adaptor (non-vPro)

Technology/Operating bands 2.4Ghz/5G

Wireless protocol standards 11ac

Maximum data rates 433Mbps

Maximum output power 16.25dBm in 2.4G

17.25dBm in 5G

Maximum power consumption 1250 mW in

11ac 1x1 HB/80

Or 11n 1x1 HB/40

Form Factor M2 2230

Weight 2 g

Dimensions 22 mm X 30 mm x 2.4 mm
(Length x Width x Thickness)

Technical Specifications

Intel Dual Band Wireless-AC 7265 802.11 AC 2x2 WiFi + BT 4.2 Combo Adapter (non-vPro)

Technology/Operating bands 2.4Ghz/5G

Wireless protocol standards 11ac

Maximum data rates 867Mbps

Maximum output power 17.25dBm in 2.4G

16.25dBm in 5G

Maximum power consumption 1580 mW in

Wi-Fi: 802.11n link at 200 mbps, FTP transmitting 90% and FTP receiving 10%.

Bluetooth: A2DP, 375 Kbps

Form Factor M2 2230

Weight 2 g

Dimensions 22 mm X 30 mm x 2.4 mm

(Length x Width x Thickness)

POWER

65 W Smart AC adapter	Dimensions (H x W x D)	107.0 x 47.0 x 30.0mm
	Weight	250g +/-10%
	Input Efficiency	88.0 % at 115 Vac and 89.0 % at 230Vac
	Input	47 to 63 Hz
	Input AC current	Max. 1.7 A at 90 Vac
	Output	65W
	DC output	19.5V
	Hold-up time	5ms at 115 Vac input
	Output current limit	<11.0A
	Connector	C6 (3pin/with grounded, with Smart ID DC connector)
Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)
	Non-operating (storage) temperature	-4° to 185° F (-20° to 85° C)
	Altitude	0 to 16,400 ft (0 to 5,000 m)
	Humidity	20% to 95%
	Storage Humidity	10% to 95%
EMI and Safety Certifications	*CE Mark - full compliance with LVD and EMC directives	
	* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV;	

Technical Specifications

		Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. * MTBF - over 200,000 hours at 25°C ambient condition.
65 W EM Smart AC adapter	Dimensions (H x W x D)	127.0x51.0x30.0mm
	Weight	350g +/-10%
	Input Efficiency	88.0 % at 115 Vac and 89.0 % at 230Vac
	Input	47 to 63 Hz
	Input AC current	Max. 1.7 A at 90 Vac
	Output	65W
	DC output	19.5V
	Hold-up time	5ms at 115 Vac input
	Output current limit	<11.0A
	Connector	C6 (3pin/with grounded, with Smart ID DC connector)
	Environmental Design	<p>Operating temperature 32° to 95° F (0° to 35° C)</p> <p>Non-operating (storage) temperature -4° to 185° F (-20° to 85° C)</p> <p>Altitude 0 to 16,400 ft (0 to 5,000 m)</p> <p>Humidity 20% to 95%</p> <p>Storage Humidity 10% to 95%</p>
	EMI and Safety Certifications	<p>*CE Mark - full compliance with LVD and EMC directives</p> <p>* Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV;</p> <p>Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE.</p> <p>* MTBF - over 200,000 hours at 25°C ambient condition.</p>
45 W Smart AC adapter	Dimensions (H x W x D)	95.0 x 40.0 x 26.5 mm
	Weight	200g +/-10%
	Input Efficiency	87.74 % at 115 Vac and 88.4 % at 230Vac
	Input	47 to 63 Hz
	Input AC current	Max. 1.4 A at 90 VAC
	Output	45W
	DC output	19.5V
	Hold-up time	5ms at 115 Vac input
	Output current limit	<8.0A
	Connector	C6 (3pin/with grounded, with Smart ID DC connector)
	Environmental Design	<p>Operating temperature 32° to 95° F (0° to 35° C)</p> <p>Non-operating (storage) temperature -4° to 185° F (-20° to 85° C)</p> <p>Altitude 0 to 16,400 ft (0 to 5,000 m)</p> <p>Humidity 20% to 95%</p> <p>Storage Humidity 10% to 95%</p>

Technical Specifications

EMI and Safety Certifications		*CE Mark - full compliance with LVD and EMC directives * Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE. * MTBF - over 200,000 hours at 25°C ambient condition.
HP 3-cell Li-Ion (31 Whr)		Dimensions 274.15mm x 35.25mm x 21.1mm Weight 185g Cells/Type 3cell Lithium-Ion cylindrical cell / 18650 Voltage LGC: 10.95V; SDI/Sanyo: 11.1V Amp-hour capacity LGC: 2850mAh;SDI/Sanyo:2800mAh Watt-hour capacity LGC: 31.2Wh; SDI/Sanyo:31.08Wh Operating (Charging) 0~45°C Operating (Discharging) -10~60°C Fuel Gauge LED No Warranty 300 cycles>80%(at 23°C) Optional Travel Battery Available No
HP 4-cell Li-Ion (41 Whr)		Dimensions 274.15mm x 35.25mm x 21.1mm Weight 230g Cells/Type 4cell Lithium-Ion cylindrical cell / 18650 Voltage LGC: 14.6V; SDI/Sanyo:14.8V Amp-hour capacity LGC: 2850mAh; SDI/Sanyo: 2800mAh Watt-hour capacity LGC: 41.6Wh;SDI/Sanyo41.44Wh Operating (Charging) 0~45°C Operating (Discharging) -10~60°C Fuel Gauge LED No Warranty 300 cycles>80%(at 23°C) Optional Travel Battery Available No

Options and Accessories (sold separately and availability may vary by country)

Category	Description	Part Number
Cases	HP Essential Backpack (up to 15.6")	H1D24AA
	HP Essential Messenger Case (up to 17.3")	H1D25AA
Docking	HP 3005PR USB3 Port Replicator	Y4H06AA
	HP USB Travel Dock	T0K30AA
Input Devices	HP 3001pr USB 3.0 Port Replicator	F3S42AA
	HP Slim USB Keyboard and Mouse	H4B81AA
Power	HP Slim Wireless Keyboard and Mouse	H6F25AA
	HP 3-Button USB Laser Mouse	G1K28AA
	HP USB Travel Mouse	N9K77AA
	HP Comfort Grip Wireless Mouse	N9K78AA
	HP Ultra Mobile Wireless Mouse	N2Z63AAA
	HP HDMI to DVI Adapter	V7W66AA
	HP 45W Smart AC Adapter 4.5mm	H6Y88AA#xxx
	HP 65W Smart AC Adapter	H6Y89AA#xxx
Storage	HP 65W Slim AC Adapter	H6Y82AA#xxx
	HP Power Bank	N9F71AA#xxx
Memory	HP External USB Optical Drive	F2B56AA
Security	HP 4GB DDR3L-1600 1.35V SODIMM	H6Y75AA#XXX
	HP 8GB DDR3L-1600 1.35V SODIMM	H6Y77AA#XXX
UCC	HP Essential Combination Lock	TOY16AA
	HP Combination Lock	TOY15AA
	HP Keyed Cable lock	TOY14AA
	HP Keyed Cable Lock 10mm	T1A62AA
	HP 15.6 NB Privacy Filter (For Jaguars and Lions only)	J7H71AA
	HP 14.0" Notebook Privacy Filter (For Colts and Rams only)	J6E65AA
	HP Conferencing Keyboard	K8P74AA#xxx
Displays	HP UC Speaker Phone	K7V16AA
	HP UC Wired Headset	K7V17AA
	HP Stereo USB Headset	T1A67AA
	HP Stereo 3.5mm Headset	T1A66AA
	HP S140u 14-inch Portable Display	G8R65AA
	HP ProDisplay P223 21.5 inch Monitor	X7R61AA
	HP ProDisplay P232 23-inch Monitor	K7X31AA
	HP ProDisplay P240va 23.8-inch Monitor	N3H14AA

Summary of Changes

Date of change:	Version History:		Description of change:
April 24, 2017	From v1 to v2	Update	Graphics Section Updated
May 2, 2017	From v2 to v3	Update	Tech specs and accessories added
July 27, 2017	From v3 to v4	Update	Software and security section updated

Copyright © 2017 HP Development Company, L.P.

The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Intel, Core, Celeron and Pentium are trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a trademark of its proprietor used by HP Inc. under license. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency. All Rights Reserved.